

### INNOVATIVE **FORMULATIONS** FOR MASTER SOLUTIONS

### **OUR PRODUCTS**

<ul><li>AEROSOL PU FOAMS</li></ul>	4-10
<ul><li>MS POLYMER SEALANTS</li></ul>	11-16
■ SILICONES	17-27
<ul><li>SEALANTS</li></ul>	28-32
- ADHESIVES	33-38
- TEOLINICAL CDDAYC	00 (



Promast is an innovative producer of primary requirements of the construction industry, focused on mounting, insulation, filling and sealant applications. Promast's specialty is the production of value added aerosol PU foams, silicones, polyurethane and hybrid based sealants and adhesives. Promast's products are geared towards professional and non-professional users.

For its business partners, Promast strives to create difference without compromising its basic core values such as; dependability, highest standards of manufacturing, broad product portfolio, leadership in innovation, strategic partnership and environmental policies. Promast's mission is to produce innovative products which have never been produced in our territory before at affordable prices. R&D is at the core of Promast. In line with this mindset, a laboratory with vast production and analysis capabilities has been instituted for this purpose. Thanks to this investment, Promast was able to obtained effective quality control system.

In ever changing market conditions and competition dynamics, Promast maintains its product quality and service standards. Promast is the very first company to receive the support of KOSGEB for manufacturing eco-friendly silane modified hybrid polymers (SPM technology) in Turkey. After moving to its new factory in 2018, Promast has completed the quality certification process. All production process is being operated under ISO 9001, ISO 14001 and OHSAS 18001 standards.

Innovative formulations for master solutions.









## **AEROSOL PU FOAMS**





Polyurethane is one of the most versatile insulating materials that we know. Polyurethane (PU) foam has many applications such as gap filling, thermal insulation, sound insulation, bonding and passive fire protection. Their ease of use, strong adhesion capability to almost all types of building materials, great filling ability, high insulation value and high efficiency make them unparalleled building materials.

Aerosol PU Foams are Promast's field of expertise. Wide range of products, innovation and a large selection of packaging and accessory options make Promast one of the leading producer of the region. Iciis sum.



### PMF-220

### Promast Fixer

### Fixing Foam

High-volume, high density polyurethane foam specially formulated for common installations and mounting applications with closed cell structure and controlled expansion.

## GUN FOAN THE STATE OF THE STATE

### PMF-520

### Promast **Expert**

### Gun Foam

It is a high efficiency and strenght polyurethane foam which adheres well to surfaces and specially formulated for use with PU Foam gun for professionals.

### $lue{ extstyle extstyle$

Fixing door and window frames to walls and filling gap.

Assembling areas such as panels, tables, air conditioners, ventilation ducts.

Mounting bathtubs to the floor.

Adhesion and insulation of common building materials.

### lacksquare Specifications $\_$

Due to its high efficiency, it provides more installation possibilities.

Designed to have controlled swelling of the foam therefore it does not exert more pressure on surfaces than necessary, and does not stretch crates

It dries quickly, reaches the form that can be cut quickly. Does not shrink, thus, provides excellent stability.

The cured foam can be sanded and painted.

Very strong adhesion to building materials.

Can be applied at low temperatures.

### 🔼 Application Areas \_\_

Assembling of door and window frames.
Assembling of pipes and panels of installations such as gas, water and electricity.
Insulation of deep cracks and gaps.

### **≡** Specifications

High volume and low density.

It has small and regular cell structure.

Reachable form to be cut within 30 minutes.

Does not runoff on vertical surfaces.

Strong adherence to almost all building materials.

Provides cost economy in frequent use.

### ( Technical Specifications

Tack-free time
Cutting time
Density
Ca. 9 mins
Ca. 35 mins
23-32 kg/m³
3% max
Shelf life
15 months
Volume
750 ml
Fire rate (DIN 4102)
B3

### ( Technical Specifications \_

Tack-free time
Cutting time
Ca. 9 mins
Ca. 30 mins
Density
18-20 kg/m³
Shrinkage
5% max
Shelf life
Volume
750 ml
Fire rate (DIN 4102)
B3



### PMF-640

### Promast **Premium**Multi-Use Foam

High-yield foam which can be applied multiple times by eliminating the risk of blocking after application with its plastic mechanical valve.



### Application Areas \_

For fixing the pipes of gas, water, electricity etc. Installations and filling the penetration gaps.

For filling holes, cracks and gaps in buildings for isolation purposes.

Assembling and fixing of many materials required in the structure.



In case of intermittent use, the valve is not blocked and can be used repeatedly in different times.


Due to its special formulation, it provides up to 30% higher performance than general purpose foams

Cures very quickly; it dries easily even at low temperatures and in low-humidity conditions.

Provides higher adhesion to common construction materials.

It provides effective sound and heat insulation. Provides controlled expansion after application.







Tack-free time
Cutting time
Density
Shrinkage
Shelf life
Volume
Fire rate (DIN 4102)

Ca. 9 mins
Ca. 35 mins
23-26 kg/m³
3% max
15 months
750 ml





### PMF-630

### Promast Fire Foam

### Fire-Rated Foam

Especaially designed for installation and filling of gaps in fire applications. Helps preventing the spread of fire with its flame retardant property.



### Application Areas \_\_\_\_

Fire-resistant demanded installations of door and window frames.

Insulation of sensitive areas such as electrical panels and ducts.

General assembly and space filling applications which requires fire resistance.

### $\equiv$ Specifications $\_$

Delays ignition.

Provides excellent insulation against gas and smoke.

Highly effective heat and sound insulation.

Excellent adhesion to wood, metal, glass and

It does not lose its isolation property until 100 minutes.

D4 class according to DIN EN 204.

## WORSEN VERINI KÖDÜK

### PMF-320

### Promast **Maxi**

### **High Yield Foam**

Fixing and gap filling foam which is designed for high efficiency and volume and recommended to be used in assembly applications where cost efficiency is crucial.

### 🚫 Application Areas \_

Wall mounting of door and window frames. Bonding of common building materials. General purpose filling and mounting applications.

### **I** Specifications \_

High efficiency up to 60 liters.

High consumption meets low cost requirement.

It has small and regular cell structure.

Strong adhesion to most building materials.

Applies sufficient pressure to the surfaces with controlled growth.

### 🕸 Technical Specifications \_

Tack-free time
Cutting time
Density
Shrinkage
Shelf life
Volume
Fire rate (DIN 4102)

Ca. 9 mins
Ca. 35 mins
28-32 kg/m³
3% max
9 months
750 ml

### Technical Specifications \_

Tack-free time
Cutting time
Density
Shrinkage
Shelf life
Volume
Fire rate (DIN 4102)

Ca. 9 mins
Ca



### PMF-625 Promast Fixate

**Adhesive Foam** 

It is a low swelling and high adhesive polyurethane gun foam which is specially formulated for bonding of polystyrene based jacketing plates and jambs.



### Application Areas \_

Bonding of EPS and XPS insulation boards to the exterior of buildings.

Bonding polystyrene jambs to concrete, plaster and wooden.

Bonding polyurethane and rock wool panels.



### **:**■ Specifications \_

It is low weight, unlike adhesive mortars, does not put static load on the building.

Due to its low expansion, it applies very low pressure to the surfaces.

It provides economical usage compared to alternative adhesives.

Contains fire retardant additives.

Dries easily.

It accelerates and facilitates the installation of insulation boards and contributes to heat insulation.

It saves time as it accelerates the transition to the plaster stage after the insulation boards are bonded.



### Technical Specifications \_

Tack-free time
Cutting time
Density
Shrinkage
Shelf life
Volume
Fire rate (DIN 4102)

Ca. 6 mins
Ca. 30 mins
21 kg/m³
5% max
15 months
750 ml
B3





### PMF-110 / PMF-115

### Promast **Eco**

### Filling Foam

Economical and effective polyurethane foam designed for general purpose gap filling applications in buildings.

### 🚫 Application Areas \_\_\_\_\_

Covering holes, cracks and gaps in buildings. Filling the gaps surrounding window frames. For general purpose filling and fixing needs.

### **≡** Specifications \_\_\_\_\_

Adheres to applied surfaces and fills.

Does not shrink.

Grows controlled.

It can be cut, sanded and painted after curing.

Does not sag on vertical applications.

### 🕸 Technical Specifications \_

Tack-free time
Cutting time
Density
Shrinkage
Shelf life
Volume net/weight
Fire rate (DIN 4102)

Ca. 9 mins
Ca. 9 mins
24-28 kg/m³
3% max
15 months
630 g/ 820 g



### PMA-115

### Promast Cleanse

### Foam Cleaner



A solvent based aerosol cleanser used to clean newly applied fresh foam and foam

With its patented new application straw it is now easier to apply.

### 🚫 Application Areas \_\_\_\_\_

For cleaning newly applied PU foams.

For cleaning foam guns.

General purpose cleanser for work tools and surfaces.

### **⋈** Specifications \_

Helps dissolve and clean dried/hardened PU foams

Softens the dried out PU foams.

Keeps the inside and outside of foam guns clean.

Can be attached on foam guns with its adaptor.

Dissolves many industrial oils.

### **!** Warnings.

Does not clean dried or hardened foam, only softens it.

Solvent contained may harm delicate surfaces. Do not leave the foam gun on the cleanser more than 15 minutes.



# **MS POLYMER SEALANTS**



66

Promast MS Polymer Sealants are environmentally friendly, single component sealants with a variety of job-specific adhesives. MS Polymerbased sealants have low VOC emission levels with high strength features and high UV resistance.



### MSP-120 Promast MS SL

### Self Level

Promast MS SL Liquid Sealant is an environment friendly Liquid Sealant. Suitable to be used for filling deep and narrow horizontal concrete or cementitious cracks where extreme movement is experienced. Promast MS SL does not contain any solvents and/or isocyanates.

### 🚫 Application Areas \_

Concrete cracks caused by water leakage.

Unreachable, thin vertical cracks.

Filling insulation molds.

Driveways, garages, sidewalks, warehouses, etc.

### $oxed{oxed}$ Specifications $oxed{oxed}$

Penetrates deep gaps.

Cures 30 minutes after application.

Spreads evenly on the application area.

Sprayable on vertical surfaces.

Prolonged elasticity.

Excellent UV resistance.

Over paintable.

Weatherproof.

Non-shrinking.

Does not contain any hazardous chemicals - odorless.

Excellent color stability, non-yellowing.

Not affected by surface moisture during

Curing - does not bubble.



### Technical Specifications

Tack-free time Skin formation time \* [20 °C / 65% R.H.] Curing speed \* [20 °C / 65% R.H.] Hardness (DIN 53505)

Density Self life Volume Ca. 30 mins Ca. 40 mins

2-3 mm / 24h 40 ± 5 Shore A

1,30 ± 0,05 g/ml

1,50 ± 0,05 15 months

290 ml cartridge
 400 ml / 600 ml sausage



### MSP-130

### Promast MS 30

### Construction Sealant

Promast MS 30 is an environmentally friendly, low modulus, high-flex, MS Polymer Sealant for the construction industry. Thanks to its high flexibility, Promast 30 is preferred especially in joint assembly applications. Promast MS 30 does not contain any solvents and/or isocyanates.

### 🚫 Application Areas \_

Sealing and bonding in the building and construction industry.

Strong elastic bonding in vibrating constructions.

Winter gardens and other frame work joints.

Suitable to be used in all types of joints; precast, concrete, wood, aluminum, glass...

Sanitary applications.

Sealing of floor joints.

### Specifications \_

Permanent elasticity.

Excellent absorption of acoustic vibrations.

Cures in 40 minutes after application.

Excellent color stability, non-yellowing.

Excellent UV resistance.

Over-paintable.

Non-sagging.

Non-shrinking.

Weatherproof.

Not affected by surface moisture during curing – does not bubble.

Does not contain any hazardous chemicals - odorless.

Excellent adhesion to most materials such as metal, aluminum, glass, wood, stainless steel, brick, concrete, cooper, some plastics and their combinations...

— Color

Brown Black Grey White

### Technical Specifications

Tack-free time Skin formation time \* (20 °C / 65% R.H.) Curing speed \* (20 °C / 65% R.H.)

Hardness (DIN 53505)

Density Self life

Volume

♦ Ca. 60 mins

Ca. 60 mins

2,5 mm / 24h

30 ± 5 Shore A

 $\frac{1}{4}$  1,34 ± 0,05 g/ml

15 months

290 ml cartridge

400 ml / 600 ml sausage



### MSP-140 Promast MS 40FC

### Multi Adhesive

Promast MS 40FC is an environmentally friendly, high modulus MS Polymer Sealant for the automotive and construction industry. Thanks to its unique Fast Curing and strong bonding features, Promast 40FC is preferred especially in the automotive, caravan and prefabricated assembly applications. Promast MS 40FC does not contain any solvents and/or isocyanates.

### $| \underline{ \land} |$ Application Areas $\_$

Construction boards: Plywood,

Laminated timber, OSB, Chipboard...

All vibrating metal joints of all types of vehicles.

Window frames, doorsteps, decorative frames.

Structural bonding in vibrating constructions.

Insulation materials: Polystyrene,

Mineral wool, Fiberglass, Polyurethane...

Floor joints, stair steps, roof edges.

Green-houses.

### |:≡| Specifications \_

Fast curing – 15 minutes after application.

Non-staining on natural stones, marbles, granites and such substrates.

Excellent adhesion to most materials such as metal, aluminum, glass, wood, stainless steel, copper, iron, brick, concrete, some plastics and their combinations.

Excellent color stability, non-yellowing.

Not affected by surface moisture during curing, does not bubble.

Does not contain any hazardous chemicals, odorless.

Excellent UV resistance.

Over-paintable.

Non-sagging.

Non-shrinking.

Weatherproof.

Color Black Grey White

### ඟි Technical Specifications .

Tack-free time Skin formation time \* (20 °C / 65% R.H.) Curing speed \* (20°C / 65% R.H.) Hardness (DIN 53505)

Density Self life Volume Ca. 5 mins Ca. 20 mins

2.5-3.5 mm / 24h

 $40 \pm 5$  Shore A

 $1,40 \pm 0,05 \text{ g/ml}$ 15 months

290 ml cartridge

400 ml / 600 ml sausage



### MSP-150

### Promast MS 50FC

### All Round-Adhesive



Promast MS 50FC is an environment friendly MS Polymer based adhesive for construction and industrial applications. Thanks to its high load caring capacity, Promast MS 50FC is the perfect choice for applications where fast assembly is required. Promast MS 50FC does not contain any solvents and/or isocyanates.

### 

Construction boards: Plywood, Laminated timber, OSB, Chipboard...

Insulation materials: Polystyrene, Mineral wool, Fiberglass, Polyurethane..

Facade structural adhesion of materials; composites, marbles, tiles, stones, metals...

All adhesion applications of construction materials.

Window frames, doorsteps, decorative frames.

Green-houses.

### $\equiv$ Specifications $\_$

Fast curing – 15 minutes after application.

Excellent adhesion to most construction materials; concrete, brick, stone, marbles, granite, steel sheets, aluminum frame, wood, plastic-bitumen

Not affected by surface moisture during curing, does not bubble.

Non-staining on natural stones, marbles, granites and such substrates.

Excellent color stability, non-yellowing.

Does not contain any toxic materials, odorless.

Excellent UV resistance.

Over-paintable.

Non-shrinking.

Weatherproof.

Non-sagging.

Color



### 🚱 Technical Specifications

Tack-free time Skin formation time \* (20 °C / 65% R.H.)

Curing speed \* (20°C / 65% R.H.) Hardness (DIN 53505)

Density Self life

Volume

Ca. 20 mins 2.5-3.5 mm / 24h  $50 \pm 5$  Shore A

 $1,45 \pm 0,05 \text{ g/ml}$ 

Ca. 15 mins

15 months

290 ml cartridge

400 ml / 600 ml sausage



### MSP-160

### Promast MS HT

### Montage Adhesive

Promast MS HT is an environment friendly Adhesive for rapid bond Montage requirements. Promast MS HT has very high initial tack, providing excellent instant grab and hold with a high load carrying capacity. Promast MS HT does not contain any solvents and/or isocyanates.

### $lue{lack}$ Application Areas $_{lue}$

Fixing almost all type of objects; such as curtain rails, washbasins, door frames, bathroom accessories, garden accessories, etc. without the use of drill or nail;

Excellent and instant adhesion to almost all materials to all materials; including all metals, ceramic tiles, concrete, all types of wood, brick, plastic, etc.

Fixing construction boards; such as, plywood, laminated timber, OSB, chipboard

Fixing insulation materials; such as, polystyrene, mineral wool, fiberglass, polyurethane.

Fixing window frames, doorsteps, and decorative frames.

Heavy accessory mounting.

Glass and mirror fixing.

Baseboards fixing.

### **≡** Specifications

Excellent and instant adhesion to various materials; natural stones, plastics, metals, concrete, ceramics, tails

Non-staining on natural stones, marbles, granites and such substrates.

Not affected by surface moisture during curing, does not bubble.

Does not contain any toxic materials, odorless.

Excellent color stability, non-yellowing.

Can be applied even under water.

Load capacity: 350 kg / 10cm<sup>2</sup>

Excellent UV resistance.

Permanent elasticity.

High initial grab - 5 seconds.

Primeless adhesion.

Perfect adhesive.

Over-paintable.

Non-sagging.

Weatherproof.

Non-shrinking.

Color



### 🚱 Technical Specifications \_

Tack-free time Skin formation time \* [20 °C / 65% R.H.] Curing speed \* [20 °C / 65% R.H.] Hardness [DIN 53505]

Density Self Life Volume Ca. 5 mins Ca. 10 mins 3 mm / 24h

60 ± 5 Shore A

1,62 ± 0,05 g/ml

12 months

290 ml cartridge



### MSP-175

### Promast MS MAX

### Montage Adhesive



Promast MS MAX is an environment friendly Adhesive for rapid bond Montage requirements. Promast MS MAX has a very high initial tack, providing excellent instant grab and hold with a high load-carrying capacity. Promast MS MAX does not contain any solvents and/or isocyanates.

### Application Areas

Fixing construction boards; such as, plywood, laminated timber, OSB, chipboard

Fixing insulation materials; such as, polystyrene, mineral wool, fiberglass, polyurethane.

Fixing almost all type of objects; such as curtain rails, washbasins, door frames, bathroom accessories, garden accessories, etc. without the use of drill or nail; Excellent and instant adhesion to almost all materials to all materials; including all metals, ceramic tiles, concrete, all types of wood, brick, plastic, etc.

Fixing window frames, doorsteps, and decorative frames.

Heavy accessory mounting.

Glass and mirror fixing.

Baseboards fixing.

### **≡** Specifications

Non-staining on natural stones, marbles, granites and such substrates.

Not affected by surface moisture during curing, does not bubble.

Does not contain any toxic materials, odorless.

Excellent and instant adhesion to various materials; natural stones, plastics, metals, concrete, ceramics, tails.

Excellent color stability, non-yellowing.

Can be applied even under water.

High initial grab - 5 seconds.

Load capacity: 450 kg / 10cm<sup>2</sup>

Excellent UV resistance.

Permanent elasticity.

Primeless adhesion. Perfect adhesive.

Over-paintable.

Non-sagging.

Weatherproof.

Non-shrinking

- Color



### Technical Specifications

Tack-free time Skin formation time \* (20 °C / 65% R.H.) Curing speed \* (20 °C / 65% R.H.)

Shore A Hardness Density Self Life

Self Life Volume Ca. 5 mins

Ca. 10 mins

2,5-3,5 mm / 24h

60 ± 5 Shore A

1,42 ± 5 g/ml

12 months

290 ml cartridge



### MSP-145 Promast Promast Clearfix

### Multi Adhesive Sealant

Promast Clearfix is an environmentally friendly, single component, high modulus MS Polymer Sealant. It's a mounting adhesive and sealant with a crystal clear structure. Promast Clearfix does not contain any solvents and/or isocyanates.



### 📐 Application Areas

Suitable for sanitary applications. Construction boards: Plywood, Laminated timber, OSB, Chipboard...

All vibrating metal joints of all types of vehicles.

Window frames, doorsteps, decorative frames. Structural bonding in vibrating constructions.

Insulation materials: Polystyrene, Mineral wool, Fiberglass, Polyurethane...

Floor joints, stair steps, roof edges.

Green-houses.



### Specifications

Fast curing – 15 minutes after application.

Non-staining on natural stones, marbles, granites and such substrates.

Excellent adhesion to most materials such as metal, aluminum, glass, wood, stainless steel, copper, iron, brick, concrete, some plastics and their combinations...

Excellent color stability, non-yellowing.

Not affected by surface moisture during curing, does not bubble.

Does not contain any hazardous chemicals, odorless. High UV resistance.

Over-paintable.

Non-sagging.

Non-shrinking

Weatherproof.

Non-shrinking



Color



### Technical Specifications \_

Tack-free time Skin formation time \* [20 °C / 65% R.H.] Curing speed \* [20 °C / 65% R.H.] Hardness (DIN 53505)

Hardnes Density Self Life Volume Ca. 5 mins Ca. 20 mins (2,5 – 3,5) mm /24h 40 ± 5 Shore A 1,05 ± 0,05 g/ml

15 months 290 ml cartridge 400 ml saussage 600 ml saussage





### **PMP-010** Promast Aqua Shield HV **High Viscosity Liquid Membrane**

Promast Aqua Shield HV is a MS Polymer based, single component, environment friendly, high viscosity liquid sealant. Suitable to be used for filling deep horizontal and vertical cracks where extreme movement is experienced. Promast Aqua Shield HV doesnot contain any solvents and/or isocyanates.

> **ProMast AQUA SHIELD LV**

**ProMast AQUA SHIELD HV** 



### PMP-011

### Promast Aqua Shield LV

### Low Viscosity Liquid Membrane

Promast Aqua Shield LV is a MS Polymer based, single component, environment friendly, low viscosity liquid sealant. Suitable to be used for floor leveling applications. Promast Aqua Shield LV does not contain any solvents and/or isocyanates.

# SILICONE SEALANTS



46

In construction industry, silicones are commonly preferred for various application needs. They perform very good on very wide range of areas from basic sealing need to gasket making applications. Choosing the right product and quality for the application improves the quality and also prolong lifetime of the work.

Promast produce wide range of products to meet needs of it's customer such as weather-seal silicones with acetoxy and neutral curing, sanitary silicones, universal construction silicones, gasket maker and fire resistant silicones. Promast do only compound-production with its own in house formulations.





### Promast All Purpose

### Pure Acetoxy Silicone

Easypack All Purpose is high quality, longlasting, 100% pure acetoxy curing silicone sealant that does not require a gun for application. Suitable for almost every application that needs silicone sealant.

### $lue{lack}$ Application Areas $\_$

Joints of wet areas like; bathtubs, showers, sinks, tiles, kitchen countertops, etc.

Wood, plastic, or aluminum windows.

General sealant applications.

### **≡** Specifications \_

It does not crack, does not lose volume.

It is very durable, permanently maintains its elasticity.

With the help of high movement capability, it can be used at joints and grouts.

It does not lose its function at very high or very low temperatures.

Cures fast. Within hours it reaches to water-proof state.

It is resistant to UV rays, weather conditions, and wear & tear. It can be used both in exteriors and interiors

Adheres strongly on common building materials (steel, tile, glass, ceramic, painted wood, polyester, etc.)

Color

White Transparent

### ( Technical Specifications

Tack-free time
Density
Skin formation\* (20°C / 65% R.H.)
Temperature resistance (Cured)
Max tension (DIN 53504)
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 10 mins
1,02 g/lt
3-4 mm / 24h
-40°C +180°C
20%
> 370%
5 °C +40 °C
12 months
200 ml



### PMS-960

### Promast Sanitan

### Sanitary Silicone

Easypack Sanitan is a neutral curing kitchenbathroom silicone which does not contain any solvents. Its one of the best options to use on the wet areas where mildew and fungus might exist. An application gun is not required.

### 🚫 Application Areas \_

Leak-proofing applications at high humidity environments such as saunas, pools, kitchens, bathrooms etc.

Leak-proofing around shower cabins, bathtubs, sinks, sanitarywares, kitchenwares etc.

Connection joints of tiles touching water.

Cold storage unit areas.

### **≡** Specifications

Solvent-free,100% pure silicone.

Cures very fast, it reaches to waterporof state within hours.

Adheres very strongly on tiles, ceramic, glass and similar nonporous surfaces.

Resistant to cleaning supplies and chemicals.

Contains long-lasting fungicides to prevent mildew and fungus to be formed.

- Color
White Transparent

### Technical Specifications

Tack-free time Ca. 15 mins Density 1,02 g/lt Skin formation\* (20°C / 65% R.H.) 3-4 mm / 24h Temperature resistance (Cured) -40°C +180°C Max tension (DIN 53504) 20% Elongation at break (DIN 53504) > 490% 5 °C +40 °C Application temperature Shelf life 12 months Volume 200 ml



### Promast RTV

### Gasket Maker

Acetoxy based high performance liquid silicone sealant which maintains its flexibility in temperatures up to +300°C. With no special curing requirements, RTV sealant has a wide range of home, automotive and industrial application. An application gun is not required. Easypack allows you to apply in narrow areas.

### 🚫 Application Areas \_

In gasketing applications where resistance to high temperatures and/or high thermal cycling in automotives, machines, heating systems, industrial owens, chimneys etc...



Acetoxy curing.

Almost odorless cure.

Resists shrinking and cracking caused by exposure to thermal cycling between -50°C ve +300°C.

Preserves its elasticity when permanently exposed to temperatures up to 250°C.

Improved oil resistance.

Can be applied on to rubber gaskets to improve strenght.

### 🕸 Technical Specifications \_

Tack-free time
Density
Skin formation\* (20°C / 65% R.H.)
Temperature resistance (Cured)
Max tension (DIN 53504)
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 10 mins
1,05 g/lt
3-4 mm / 24h
-40°C +250°C
10%
> 310%
5 °C +40 °C
12 months
200 ml



### PMS-975

### Promast RTV-NT

### **Neutral Gasket Maker**

Neutral curing high performance silicone sealant which maintains its flexibility in temperatures up to +300°C. Can be applied to sensitive surfaces and adheres perfectly to make gasket. Extra high quality and odorless silicone sealant which is designed to be used as gasket. An application gun is not required. Easypack allows you to apply in narrow areas.

### 🚫 Application Areas \_

In gasketing applications where resistance to high temperatures and/or high thermal cycling in automotives, machines, heating systems, industrial owens, chimneys etc...

Very good solution for gasket needs of rubber gaskets which is hard to find.

Meets extra high quality gasket needs for specific applications.

### **≡** Specifications

Neutral curing. Does not release any acid and can be applied on sensitive metals.

Pure silicone, does not contain any organic extender.

Almost odorless cure

Resists shrinking and cracking caused by exposure to thermal cycling between -50°C ve +300°C.

Preserves its elasticity when permanently exposed to temperatures up to 250°C.

Improved oil resistance.

— Color

Black Grey Red

### Technical Specifications

Tack-free time Ca. 10 mins Density 1,05 g/lt Skin formation\* (20°C / 65% R.H.) 3-4 mm / 24h Temperature resistance (Cured) -40°C +250°C Max tension (DIN 53504) 10% > 450% Elongation at break (DIN 53504) 5 °C +40 °C Application temperature Shelf life 12 months Volume 200 ml



### Promast Oxime

### **Neutral Silicone**

Promast Oxime is an high performance neutral cure pure silicone sealant which is suitable with sensitive metals and concrete surfaces. Stays flexible at all times and endures weather conditions and has the volume stability.



### 🔼 Application Areas \_

Bonding and fixing mirrors.

Leak-proofing application on acid sensitive alkali metal surfaces.

Sealing the joints around windowpanes.

Suitable on concrete, brick, steel, chrome, brass, zinc, copper, enamel, epoxy, polyester, PVC, ceramic, tile and glass surfaces.



### **≡** Specifications \_

Does not crack, does not lose volume .

It is very durable, permanently maintains its elasticity.

With the help of high movement capability, it can be used at joints and grouts.


Does not lose its function at very high or very low temperatures.

Cures fast. Within hours it reaches to water-proof

It is resistant to UV rays, weather conditions and wear & tear. It can be used both in exteriors and interiors.

Adheres strongly on common building materials (steel, tile, glass, ceramic, painted wood, polyester, etc.)





### 🕸 Technical Specifications \_

Tack-free time Density

Skin formation\* (20°C / 65% R.H.) Hardness (DIN 53505)

Elongation at break (DIN 53504)

Application temperature

Shelf life

Volume

Ca. 15 mins

1,03 g/lt

3 mm / 24h

22 ± 5 Shore A

> 450%

∮ 5°C - 40°C

15 months

280 ml





### **Promast Sanitan**

### Sanitary Silicone

Promast Sanitan is 100% pure kitchenbathroom silicone sealant. which is one of the best options for wet areas to avoid mildew and fungus to be formed.



### PMS-560

### Promast Sanitan NT

### **Neutral Sanitary Silicone**

Promast Sanitan NT is a neutral curing 100% pure kitchen-bathroom silicone sealant which can be also used on sensitve surfaces. It is very high performance sealant with antibacterial protection which prevents mould and fungal growth on wet environments.

### $lue{ extstyle extstyle$

High humidity environments such as saunas, pools, kitchens, bathrooms etc.

Leak-proofing around shower cabins, bathtubs, sinks, sanitarywares, kitchenwares etc.

Connection joints of tiles touching water.

Cold storage unit areas.

### $\equiv$ Specifications $_{-}$

Solvent-free, 100% pure silicone sealant.

Adheres very strongly on tiles, ceramic, glass and similar nonporous surfaces.

Resistant to cleaning supplies and chemicals.

Contains long-lasting fungicides to prevent mildew and fungus to be formed.

### Application Areas \_

High humidity and wet environments such as saunas, pools, kitchens, bathrooms etc.

Suitable with polyester, PVC and acrylic bathtubs, shower trays and sinks.

Connection joints of tiles touching water.

Sealing around shower cabins, bathtubs, sinks, sanitarywares etc.

Especially on sensitive surfaces.

### **≡** Specifications

100% pure silicone sealant, organic oil-free.

Does not shrink with time.

Contains long-lasting fungicides to prevent mildew and fungus to be formed.

Long-term resistant to humidity and moisture.

Resistant to cleaning supplies and chemicals.

Low-odour cure, non-corrosive.

Strong adhesion to acrylic and polyester bathtubes and washbasins; pvc shower cabins and shower trays.

Suitable on glass, tile, ceramic, metal, concrete and wood substrates.

Color
White Transparent

### Technical Specifications \_

Tack-free time
Density
Skin formation\* (20°C / 65% R.H.)
Hardness (DIN 53505)
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 15 mins
1,02 g/lt
2-3 mm / 24h
21 ± 5 Shore A
> 450%
5 °C - 40 °C
15 months
280 ml



### Technical Specifications \_

Tack-free time Ca. 15 mins Density 1.03 a/lt Skin formation\* (20°C / 65% R.H.) 3 mm / 24h Hardness (DIN 53505)  $20 \pm 5$  Shore A Elongation at break (DIN 53504) > 450% Application temperature 5 °C - 40 °C Shelf life 15 months Volume 280 ml



### Promast Facade

### **Contruction Silicone**

Flexible neutral cure silicone sealant suitable for sealing applications on a wide variety of construction materials and building facades.



### Application Areas \_

Sealing applications around construction elements as concrete, metal, wood, brick and plastics.

Perimeter sealing of window and door frames. Sealing of expansion joints.



### **≡** Specifications

Suitable for most construction sealing applications.

Strong unprimed adhesion to a wide variety of construction materials including concrete, brick, wood, aluminum and plastics.

Low-odour cure.

Non-corrosive, does not release acid.

Resistant to extreme temperature change.





### Technical Specifications

Tack-free time Density

Skin formation\* (20°C / 65% R.H.)
Hardness (DIN 53505)
Elongation at break (DIN 53504)
Elasticity Modulus 100% (DIN 53504)
Application temperature

Shelf life Volume 🛉 Ca. 20 mins

1,03 g/ml +/- 0,02 / 1,45 g/ml +/- 0,02

• 2-3 mm / 24h

35 ± 5 Shore A

> 450%

> 1 N/mm²

5 °C - 40 °C

15 months

310 ml





### Promast RTV

### **Gasket Maker**

Acetoxy based high performance liquid silicone sealant which maintains its flexibility in temperatures up to +300°C. With no special curing requirements, RTV sealant has a wide range of home, automotive and industrial application.

### Application Areas \_

In gasketing applications where resistance to high temperatures and/or high thermal cycling in automotives, machines, heating systems, industrial owens, chimneys etc...

### **≡** Specifications

Acetoxy curing.

Almost odorless cure.

Resists shrinking and cracking caused by exposure to thermal cycling between -50°C ve +300°C

Preserves its elasticity when permanently exposed to temperatures up to 250°C.

Improved oil resistance.

Can be applied on to rubber gaskets to improve strenght.



### 🐯 Technical Specifications \_

Tack-free time
Density
Skin formation\* (20°C / 65% R.H.)
Hardness (DIN 53505)
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 20 mins
1,05 g/lt
2-3 mm / 24h
27 ± 5 Shore A
> 300%
5 °C - 40 °C
15 months
280 ml



### PMS-660

### Promast RTV-NT

### **Neutral Gasket Maker**

Neutral curing high performance silicone sealant which maintains its flexibility in temperatures up to +300°C. Can be applied to sensitive surfaces and adheres perfectly to make gasket. Extra high quality and odorless silicone sealant which is designed to be used as gasket.

### 🚫 Application Areas \_

In gasketing applications where resistance to high temperatures and/or high thermal cycling in automotives, machines, heating systems, industrial owens, chimneys etc...

Very good solution for gasket needs of rubber gaskets which is hard to find.

Meets extra high quality gasket needs for specific applications.

### **≡** Specifications

Neutral curing. Does not release any acid and can be applied on sensitive metals.

Pure silicone, does not contain any organic extender

Almost odorless cure.

Resists shrinking and cracking caused by exposure to thermal cycling between -50°C ve +300°C

Preserves its elasticity when permanently exposed to temperatures up to 250°C.

Improved oil resistance.



### Technical Specifications

Tack-free time Ca. 10 mins Density 1.05 a/lt Skin formation\* (20°C / 65% R.H.) 2-3 mm / 24h Hardness (DIN 53505)  $30 \pm 5$  Shore A Elongation at break (DIN 53504) > 400% Application temperature 5 °C - 40 °C Shelf life 15 months Volume 280 ml



### Promast Glass

### Aquarium Silicone

Promast Glass, also known as aquarium silicone, is a high-performance acetoxy silicone sealant which can be used for bonding and sealing applications on glass substrates without any harmful ingredients to any living being.



### PMS-455

### Promast Weatherseal

Weatherseal Silicone

Low modulus neutral silicone sealant suitable for weather resistant applications onbuilding facades.

### $\left| igsep \right|$ Application Areas $_-$

Aguariums.

Portable water tanks.

Agurium bonding and sealing.

Glass to glass bondings.

### 

Expansion joints on building façades. Weather resistant sealing, bonding and glazing applications.

### |≔| Specifications \_\_\_\_\_

Solvent-free, 100% pure silicone.

Not poisonous, doesn't give any harm to animals or organisms.

Excellent adhesion on glass.

Does not shrink.

Resistant to UV light, does not turn yellow.

Abrasion resistant.

Resistant to cleaning supplies and chemicals.

Suitable for indoor and outdoor use.

Cures very fast. Can be exposed to water several hours after the application.

ig|lefartright| Specifications  $\_$ 

Excellent adhesion on wide variety of construction materials as concrete, stone, brick, wood, steel, alass etc.

Durable and resistant to weather conditions and temperature shifts.

Very fast cure, does not pick up dirt.

Does not crack.

Does not contain solvent, non-shrink.

Color Black Transparent

### 🚱 Technical Specifications \_

Color

Tack-free time Ca. 20 mins Density 1,03 g/ml +/- 0,02 / 1,45 g/ml +/- 0,02 Skin formation\* (20°C / 65% R.H.) 2-3 mm / 24h Hardness (DIN 53505)  $30 \pm 5$  Shore A Elongation at break (DIN 53504) > 800% > 1,30 N/mm<sup>2</sup> Elasticity Modulus 100% (DIN 53504) 5 °C - 40 °C Application temperature Shelf life 15 months Volume 310 ml

### ඟි| Technical Specifications \_\_\_

Tack-free time Density Skin formation\* (20°C / 65% R.H.) Hardness (DIN 53505) Elongation at break (DIN 53504) Application temperature Shelf life Volume

Ca. 15 mins 1,02 g/lt 3-4 mm / 24h 20 ± 5 Shore A > 350% 5 °C - 40 °C 15 months 280 ml



### Promast Fire Seal

### Fire-Rated Silicone

Highly flexible firestop silicone sealant for construction joints and pipe penetrations.



### 🔦 Application Areas \_

Expansion or stretched-connection joints in fire compartment walls and floors.

Pipe, cable or duct penetrations through fire compartment walls and floors.

All applications where fire protection is needed.

### $oxed{square}$ Specifications $\_$

Fire resistant up to 4 hours.

Strong unprimed adhesion to most porous and non-porous construction materials.

Suitable for use in concrete, stone and sensitive metals.

High movement capability up to %25.

Low-odour, non-corrosive.

Outstanding resistance to UV lights, weather conditions and temperature extremes.

- Color Transparent

### 🕸 Technical Specifications \_

Tack-free time
Density
Skin formation\* (20°C / 65% R.H.)
Hardness (DIN 53505)
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 10 mins
1,26 g/lt
1-3 mm / 24h
42 ± 5 Shore A
> 150%
5 °C - 40 °C
12 months
310 ml

### Parket Perferance of the Parket Perferance of

### PMS-482

### Promast EPDM

### Membrane Adhesive

One component, elastic neutral cure silicone for bonding EPDM membranes.

### 🚫 Application Areas \_

Bonding EPDM membranes.

Sealing between EPDM membranes and the other construction materials.

### **≡** Specifications

Oxime silicone, low odor.

Suitable for indoor and outdoor applications.

Strong and permanently elastic.

Strong adhesion on common construction materials. Resistant to weather conditions.

Color

Black

### 🕲 Technical Specifications \_

Tack-free time Ca. 10 mins Density 1,42 g/ml +/- 0,02 Skin formation\* (20°C / 65% R.H.) 2-4 mm / 24h Hardness (DIN 53505)  $35 \pm 5$  Shore A Elongation at break (DIN 53504) > 800% Application temperature 5 °C - 40 °C Shelf life 15 months Volume 600 ml saussage



### Promast All-Purpose

### Pure Acetoxy Silicone

High performance acetoxy curing silicone sealant which can be applied to almost every silicone applications. Does not shrink or crack after application and resistant to funaus.



### PMS-150

### Promast Ecosil

Silicone Sealant

Strong adhering, single component silicone for tile and glass-like nonporous surfaces.

### $| \underline{ riangle \setminus} |$ Application Areas $\_$

Joint of wet areas like; bathtubs, showers, sinks, tiles, kitchen counter tops etc.

Wood, plastic or aluminium windows.

General sealant applications.

### ert oxtimes ert Specifications oxtimes

Does not crack, does not lose volume.

It is very durable, permanently maintains its elasticity

With the help of high movement capability, it can be used at joints and grouts.

Does not lose its function at very high or very low temperatures.

Cures fast. Within hours it reaches to water-proof

It is resistant to UV rays and weather conditions.

It can be used both in exteriors and interiors.

Adheres strongly on common building materials (steel, tile, glass, ceramic, painted wood, polyester,



### 🚱 Technical Specifications \_

Tack-free time Ca. 10 mins Density 1,02 g/lt Skin formation\* (20°C / 65% R.H.) 3-4 mm / 24h Elongation at break (DIN 53504) > 350% Application temperature 5 °C - 40 °C Shelf life 15 months Volume 280 ml

### 🔼 Application Areas \_

For general interior and exterior leak-proofing applications.

For wet surfaces such as kitchens, bathrooms and others.

### [≔ Specifications

Creates a waterproof barrier when it dries.

It has acetoxy curing system.

Does not runoff of vertical surfaces.

Adheres to common building materials.

Not effected from UV rays.

Withstands temperature changes.



### 🚱 Technical Specifications \_

Tack-free time Ca. 25 mins Density 0,96 g/lt Skin formation\* (20°C / 65% R.H.) 2-3 mm / 24h Elongation at break (DIN 53504) > 550% Application temperature 5 °C - 40 °C Shelf life 15 months Volume 280 g

## PU SEALANTS



**6 6** 

PU sealants are unique products which have strong bonding and sealing capability which make them preferred by construction, automotive and marine industry for indoor or outdoor usage. Also being paintable, UV resistant and durable against all weather conditions differentiate them from other products.

Promast PU sealant range includes both low and mid modulus products, allowing you to select the most appropriate level of elasticity to fulfill the need of various industries such as construction, automotive and marine.



### PMP-725 / PMP-735 / PMP-755

### Promast Seal & Bond

**Adhesive Sealant** 

Promast Seal&Bond is a single-component, multipurpose, elastic adhesive and sealant. Following to application, it reacts with ambient humidity to form a durable and tough rubber seal.



Sealing and bonding applications in vehicles.

In production and installment of vehicle bodies.

Elastic adhesion of wood, plaster board, metal, brick etc materials.

Sealing applications in static joints.

In roofing applications.

Joints between prefabricated construction materials. Sealing and bonding of ventilation ducts, gutters and spouts etc.

At pre-cast concrete panels expansion joints. Body construction of cars, containers, caravans etc. For vibration reduction in all type of sheet metal assembly works.

### **≡** Specifications

Permanently elastic 25 % movement capability. No shrinkage.

Cures bubble-free.

No sagging – Thixotropic.

Overpaintable.


Suitable both for indoor and outdoor applications. Suitable for light and medium traffic.

Strong adhesion on metal, glass, wood, concrete, brick, tile.

### (3) Technical Specifications




### **PMP-725**





PMP-735











Tack-free time	<b>†</b> (	Ca. 45 mins
Density	ļ ^	1,25-1,4 g/ml
Curing speed * (20°C/65% R.H.)	<b>•</b> 5	55 ± 5 Shore A
Skin formation* (20°C/65% R.H.)	<b>+</b> 2	2,5-3 mm
Elongation at break (DIN 53504)	<b>•</b> ;	>600
Application temperature	<b>•</b> 5	5 °C - 40 °C
Shelf life	ļ ^	12 months
Volume	<b>4</b> 3	310 ml



### PMP-730

### Promast Glazepro

### **Balcony Glazing Adhesive**

Promast GlazePro is an elastic, one component joint silicone sealant for glazing applications.



### PMH-860

### Promast **Decaulk**

### **Deck Caulk**

Decaulk is a one component, non-corrosive, high quality fast curing sealant designed especailly for marine applications where UV, extreme weather, long time fresh & salt water resistance and waterproof properties are required.

### $lue{lack}$ Application Areas $\_$

Weatherproof.

Odorless curing.

Durable.

Non-sagging.

Non-corrosive.

Non-shrinking.

Excellent adhesion to most materials such as metal, aluminum, glass, wood, stainless steel, brick, concrete, cooper and some plastics and their combinations...

### $\blacksquare$ Specifications $\_$

Glass balcony glazing applications.

Shop windows.

Greenhouses.

### $oxedsymbol{\underline{N}}$ Application Areas $\_$

Designed for sealing of connection joints between teak decks and variety of decking substrates.

### **≡** Specifications

Remains elastic under extreme weather conditions.

High filling capacity.

Provides excellent protection and insulation.

Resistant to sea water and chemicals.

Solvent and isocyanate-free .

Cures bubble free.

Does not shrink with time.

Easy to sand.

### 🕲 Technical Specifications \_

Tack-free time Density

Curing speed \* [20°C/65% R.H.] Skin formation\* [20°C / 65% R.H.] Elongation at break [DIN 53504]

Application temperature

Shelf life

Volume

Ca. 30 mins
1,30 g/ml
45 ± 5 Shore A
2,5-3 mm
>500
5 °C - 40 °C
15 months
290 ml cartridge
400 ml / 600 ml
sausage

### Technical Specifications

Tack-free time

Density

Skin formation\* (20°C / 65% R.H.) Elongation at break (DIN 53504)

Application temperature

Shelf life

Volume

Ca.60 mins

1,24 g/ml

3 mm

> 300%

5 °C - 40 °C 12 months

310 ml



### PMW-200 Promast Acryseal-FR

Fire-Rated Sealant

Highly flexible firestop silicone sealant for construction joints and pipe penetrations.



### PMW-165

### Promast Acryseal-Plus

Siliconized Sealant

Universal acrylic sealant for filling cracks and joints both indoors and outdoors which is a cost-effective sealant solution for static joints.

### 🚫 Application Areas \_\_\_\_\_

Expansion or stretched-connection joints in fire compartment walls and floors.

Pipe, cable or duct penetrations through fire compartment walls and floors.

All applications where fire protection is needed. .



### 🚫 Application Areas \_\_\_\_\_

Sealing of low movement joints between various construction materials.

Sealing joints between windows, walls, doors etc.

Filling cracks in walls and on ceilings.

### **■** Specifications \_\_\_\_\_

Fire resistant up to 4 hours.

Strong unprimed adhesion to most porous and non-porous construction materials.

Suitable for use in concrete, stone and sensitive metals.

High movement capability up to %25.

Low-odour, non-corrosive.

Outstanding resistance to UV lights, weather conditions and temperature extremes.

### **등** Specifications \_

Over paintable.

Very easy to apply and clean.

Water-proof after curing.

Can be used on all porous surfaces such as brick, concrete, wood etc.

No odour.

### 🚱 Technical Specifications \_

Tack-free time
Density
Elongation at break (DIN 53504)
Application temperature
Shelf life
Volume

Ca. 20 mins
1,52 g/ml
>200
5 °C - 40 °C
18 months
290 ml cartridge
400 ml / 600 ml
sausage

### Technical Specifications \_

Tack-free time

Density

Application temperature

Shelf life

Volume

Ca. 20 mins

1,55 g/ml

5 °C - 40 °C

18 months

310 ml



### STX-100


### Shell **Tixophalte Wet**

### **Bitumen Sealant**

Shell Tixophalte Wet is a high-performance, ready to use bituminous compound that can be used as a filler, joint sealer or adhesive in a a wide range of applications.

It adheres to many surfaces (brick, hydraulic concrete, blocks, PVC, PP, PE, PUR, EPS, metals, glass, bituminous concretes, waterproofing layer) even when it is applied under water.

Shell Tixophalte can be used as a sealant, adhesive or filler with many domestic and commercial applications including infrastructure applications, hydraulic applications and buildings.

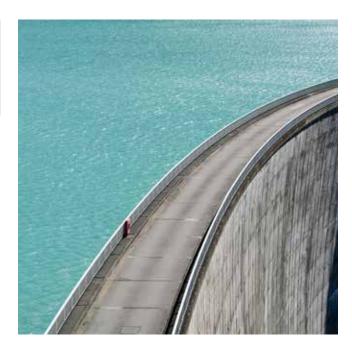

### $lue{}$ Application Areas $\_$

Canals and waterways.

Ponds.

Drains and pipes.

Gutters and drain systems.

Chimneys.

Roofing felts.

Concrete bridge decks.

Boatses.

### **≣** Specifications \_

Safe, easy and ready-to-use.

No run-off, even on vertical surfaces.

Excellent direct adhesion, sticks directly to most wet surfaces and most building materials.

Can be applied under water – ideal for damp and wet conditions during application and over its lifetime.

Protection against rust, damp and corrosion.

UV resistance.

Meets the ISO 11600 standard which defines the physical properties of building sealants.

Approved by water quality organisations for use in contact with drinking water.

Ca. 60 mins

45 ± 5 Shore A

1,24 g/ml



Tack-free time

Density

Hardness (DIN 53505)

Curing

Shrinkage

Elongation at break

Elastic recovery

Shelf life Volume • 3 mm • max 3%

> 300

2,05 MPa

12 months

**↓** 310 ml





## **ADHESIVES**



4

Polyurethane Adhesives are used for bonding of various materials such as wooden, MDF, concrete, polystyrene and polyurethane insulation boards, marble, granite and ceramics, especially used in areas exposed to water and humidity.

Promast have wide range of PU based adhesives which can meet expectations of various applications with its strong bonding capacity and high water resistance strength which conforms to D4. (DIN EN 204)



### PMA-580

### Promast PU Nail

### **Construction Adhesive**

Promast PU Nail is a permanent bonding adhesive where porous and non porous building materials needed to adhere to each other.



### PMA-595

### Promast NonFoam

### Polyurethane Adhesive

Promast Non-Foam is an extra-strong filled polyurethane adhesive with very limited expansion and long-open time.

### $lue{ extstyle extstyle$

Bonding wood window panes and door frames.

Steel door installations.

Staircase installations.

Furniture making and repairing.

Marine industry.

Bonding material on wet and humid areas.

Decoration materials fixing.

### ≡ Specifications \_\_\_\_\_

High-resistant to moist and water.

Water resistant - D4 class according to DIN EN 204.

High-resistance to chemicals.

Indoor and outdoor usage.

Fills the gaps on surfaces while bonding.

Can be sandpapered and painted over.

It has high heat endurance compared to alterenative mounting adhesives.

Can be easily applied on vertical surfaces.

Adheres to concrete, wood, ceramic tiles, polystyrene panels very strong.

### $oxedsymbol{igselfn}$ Application Areas $oxedsymbol{igselfn}$

Bonding polystyrene foam, styrofoam, decorative facade elements, wood, natural stone, pvc, concrete walls, ceramic tiles and etc.

Strong bonding applications which which cannnot be pressed during curing.

### **≡** Specifications

Low expansion.

Strong bonding.

Fiber glass inforced.

Water resistant - D4 class according to DIN EN 204.

Allows vertical applications.

Especially adheres strong to acrylic, pvc and polystyrene kind of syntethic surfaces.

### 🕸 Technical Specifications \_\_\_\_

Open time (20°C)

Density

Clamping time

Water and humidity resistance

Application temperature Operating temperature

Operating ten

Shelf life Volume Ca. 20 mins

1,26 g/ml

60 - 90 mins

**D**4

5°C to +30°C

-40°C to +80°C

12 months

310 ml

### Technical Specifications \_

Open time (20°C)

Density

Water and humidity resistance Application temperature

Operating temperature

Shelf life

Volume

Ca. 45 mins

1,19 g/ml

D4

5°C to +30°C

-40°C to +80°C

12 months

310 ml



### PMA-590

### Promast Heavy-Duty

### Polyurethane Adhesive

Promast Heavy-Duty is a ultra stong PU adhesive reinforced with chopped glass fiber which can be used for materials work under heavy load after bonding.



### PMA-690

### **Promast Corner Bond**

### **Corner Adhesive**

Polyurethane based corner jo int adhesive used for bonding aluminum profiles. Fasi curing, water resistant (D4) adhesive with strong adhesion features.

### 🚫 Application Areas \_\_\_\_\_

Sealing and bonding of the most common substrates which will work under heavy load.
Bonding staircase / Bonding wood floors.

### .. . . .

🔼 Application Areas \_

Aluminium brackets.

Doors and windows.iety of decking substrates.

### ≡ Specifications \_\_\_\_\_

Very fast-curing.

Water resistant - D4 class according to DIN EN 204.

High performance in extreme weather and temperature conditions.

Resistant to chemicals and water.

Does not sag on vertical applications.

Transparent.

### **≡** Specifications \_\_\_\_\_

Fast curing-low pressing time.

Vertical and horizontal use. Non-sagging properties.

Resistant to moisture, water and sea water-D4.

Interior and exterior use.

Transparent.

Provides good adhesive strength with various substates.

### 🕸 Technical Specifications \_\_\_\_\_

Open time (20°C)

Density

Water and humidity resistance

Clamping time

Application temperature

Operating temperature

Shelf life

Volume

1,16 g/ml

Ca. 10 mins

D4

Ca. 30 mins

5°C to +30°C

-40°C to +80°C

12 months

310 ml

### ( Technical Specifications \_\_\_

Density

Water and humidity resistance

Open time

Clamping time

Shelf life

Volume

♦ 1,15 g/ml

**₽** D4

Ca. 10 mins.

Ca. 30 mins.

12 months

🕨 310 ml



### PMA-585

### Promast Clear Bond

### Liquid Nail

Promast Clear-Bond is a fast curing PU montage adhesive with water and humidity resistant.



### MSP-135

### Promast Autobond FC

### Multi-Purpose Sealing Adhesive

Promast Autobond is an environmentally friendly, single component, high modulus MS Polymer Sealant for the automotive industry. Its unique fast curing and strong bonding features, Promast Autobond is preferred especially in the caravan assembly applications. It does not contain any solvents and/or isocyanates.

### $lue{ extstyle extstyle$

Wood furniture production.

Boat and yacht production.

Wooden door and window production and assembly.

Bonding concrete, most metals, glass, rockwool, wood, tile and stone elements.

Water resistant - D4 class according to DIN EN 204.

### $oxed{oxed}$ Specifications $oxed{oxed}$

Short pressing time.

Fast curing.

Water resistant

Transparent.

Easy to apply.

### $lue{ extstyle extstyle$

Fast curing – 15 minutes after application.

Non-staining on natural stones, marbles, granites, and such substrates.

Excellent adhesion to most materials such as metal, aluminum, glass, wood, stainless steel, copper, iron, brick, concrete, some plastics, and their combinations...

Excellent color stability, non-yellowing.

Not affected by surface moisture during curing does not bubble.

Does not contain any hazardous chemicals, odorless.

Excellent UV resistance.

Over-paintable.

Non-sagging.

Non-shrinking. Weatherproof.

### **≡** Specifications \_

All vibrating metal joints of all types of vehicles. Mineral wool, Fiberglass, Polyurethane...

### 🕸 Technical Specifications \_\_\_\_

Open time (20°C)

Density

Water and humidity resistance

Clamping time

Application temperature

Operating temperature

Shelf life

Volume

Ca. 10 mins

1,15 g/ml

Π4

Ca. 30 mins

5°C to +30°C

-40°C to +80°C

12 months

310 ml

### Technical Specifications \_

Open time (20°C)

Density

Water and humidity resistance

Clamping time

Viscosity (20°C)

Application temperature

Operating temperature

Shelf life

Volume

Ca. 40 mins

1,10 g/ml

D4

4 hours

6.000-8.000 cps

10°C to +30°C

-15°C to +100°C

12 months

500 g



### PMA-170 Promast Eco Marine Marine Glue

Eco Marine is an economic choice who need strong and water resistant bonding for wood to wood or wood to different materials.



### Application Areas \_

Wood to wood aplications.

Wood to metal, some plastics, stone, bicks, concrete applications.

Furniture mounting or reparing.

Yacht or boat constructions.



### **≡** Specifications \_\_\_\_\_

D4 according to DIN EN 204.

Water and moisture resistant.

Fast curing.

Easy to apply.

Can be sanpapered or trimmed after 2 hours.

Limitied expansion.

Stong adherence to surfaces.



### Technical Specifications \_

Tack-free time
Skin formation time \* [20 °C / 65% R.H.]
Curing speed \* (20 °C / 65% R.H.]
Hardness (DIN 53505)

Density Self life

Self life Volume Ca. 5 mins

Ca. 20 mins

2,5–3,5 mm / 24h

40 ± 5 Shore A

 $1,40 \pm 0,05 \text{ g/ml}$ 

15 months

290 ml cartridge 400 ml / 600 ml sausage



### PMA-180 Promast Adwood

Promast Adwood is a polyurethane based, water-proof liquid wood adhesive with very strong bonding capabilities.



### PMA-282

### Promast Express

**Express Transparent Wood Adhesive** 

Promast Express is a rapid-curing, liquid and transparent polyurethane adhesive which shortens the clamping time to half.

### 🚫 Application Areas \_

Adhering almost all types of wood surfaces with each other; metals; some type of plastics, stones, bricks and concrete.

Adhering wood construction materials and their repairs.

Manufacturing furniture and their repairs.

Yacht and boat constrution industry.

### Specifications \_

Meets D4 specs according to DIN EN 204.

High water and moisture resisstancy.

Easy to apply.

Can be sanpapered or trimmed after 2 hours.

Limitied expansion.

Stong adherence for wood to wood and wood to other materials applications.

Paintable.

Solvent free.

### 🚫 Application Areas \_\_

Suitable for wood construction materials and their repair work.

Manufacturing and fixing wood door frames and window sills.

Yacht and boat construction.

### **|≔**| Specifications

Very short open-time and clamping time.

Strong adhesion on wood, concrete, bricks, metal and glass.

Meets D4 specs according to DIN EN 204.

Low viscosity.

Odourless curing.

Gap filling capability.

Resistant to water, humidity and warm enviroments.

Light yellow and transparent appearence.

### 🚱 Technical Specifications \_\_\_\_

Open time (20°C)

Density

Water and humidity resistance

Clamping time

Viscosity (20°C)

Application temperature

Operating temperature

Shelf life

Volume

Ca. 40 mins

1,10 g/ml

D4

4 hours

6.000-8.000 cps

10°C to +30°C

-15°C to +100°C 12 months

750 g

### 🔯 Technical Specifications 🗕

Open time (20°C)

Density

Water and humidity resistance

Clamping time

Viscosity (20°C)

Application temperature

Operating temperature

Shelf life

Volume

10-15 mins

1,10 g/ml

D4

2 hours

3.000-4.000 cps

10°C to +30°C

-15°C to +100°C

12 months

750 g

# **TECHNICAL SPRAYS**









### PTS-470 Promast Brake & Clutch Cleaner

Oil, Dust & Dirt Remover

Cleans the metal parts of motor vehicles. Eliminates squeal noises caused by friction. Instantly clean oil, dirt, and dust. Do not leave residue after use.



Mechanical and hydraulic discs and cylinders, brake pads, engine surface and clutch.



### PTS-450 Promast Multi Purpose Lubricant Squeak Stopper

Safely lubricates moving parts such as hinges, wheels, rollers, chains, and gears. Protects metal surfaces against rust and corrosion on items like tools. Penetrates to free stuck corroded parts like nuts, bolts, valves, and locks. Quickly removes adhesives, corrosion and paint also displace moisture from the surface.



Bolts, nuts, hinges, chains, gardening tools, lucks etc.



### PTS-460

### Promast Mold Release Spray

Silicone Spray

Can be applied to all mold surfaces. Ensures that the molds come out properly and are not damaged. Reduces friction in molds and prevents sticking. Fastens the production pace.

### Application Areas \_

In all kinds of mold release processes (Metal, rubber, silicone, plastic, etc.), in the separation of mold materials that will not be painted over later.



### PTS-420 Promast Rust Remover MoS2

MoS2

It can be used on metal surfaces corroded by rust due to water and humidity. Cleans dust and oil on metal surfaces. Protects against moisture. After use, it forms a thin film on the surface and delays rusting.

### Application Areas\_

Automotive, industry, marine, household appliances, nuts and bolts, door and cabinet hinges.



### PTS-410 Promast Liquid Grease Permanent Lubricant

Promast Liquid Grease prevents machine gear & tools from friction. Use for lubricating purposes. Prevents corrosion. Reduces friction noise and increases efficiency. Extends product life by preventing wear.



### PTS-430 Promast Silicone Spray

**Reduces Friction** 

Provides a waterproof, low friction coating to protect the applied area. Suitable for silicone-friendly surfaces. When used in areas such as door seals, It does not harden the cords. That allows stopping noise and dust from entering.

### 🖎 Application Areas \_\_\_\_\_

PTS-470

Forklifts, gear systems, construction machines etc.



### ProMast

### Anti Corrosive It can be used on metal surfaces corroded by rust due to water and humidity. Cleans

Promast Rust Remover

It can be used on metal surfaces corroded by rust due to water and humidity. Cleans dust and oil on metal surfaces. Protects against moisture. After use, it forms a thin film on the surface and delays rusting.



Vehicle door seals, door hinges, hatch covers, conveyors, textile machinery (including sewing needles)



### PTS-440 Promast Electric Contact Cleaner Prevents Rust & Corrosion

Cleans electrical and electronic parts from dust, oil, and other dirt. It doesn't leave any residue on the surface. Prevents external effects such as moisture, rust, and corrosion. Provides deep cleaning on the applied surface.

### Application Areas \_

Automotive, industry, marine, household appliances, nuts and bolts, door and cabinet hinges.

### Application Areas \_

Electrical circuits and boards, regulators, household appliances, wiring operations, car door, and trunk locks, car headlight holders, and plugs, hinges, locks, rails.

NOTES	

NOTES	

### INNOVATIVE FORMULATIONS FOR MASTER SOLUTIONS



ProMast	ProMast	ProMast	ProMast		roMast	ProMast	ProMast
ProMast	ProMast	ProMast	ProMast		Mast	ProMast	ProMast
ProMast	ProMast	ProMast	ProMast	1	Mast	ProMast	ProMast





Address Ovacık Mah. Hacıoğlu Sok. No:21B Kullar Mevkii, 41140 Başiskele / KOCAELİ
Phn +90 (262) 335 41 82 | Fax +90 (262) 335 41 83 | E-Mail info@promast.com.tr

